


# CONTI®V POWER

Wrapped heavy-duty V-belts with low-stretch tensile member and advanced compound for transmitting lots of power with highest loads

## Properties:

- Temperature range from -30 °C to +80 °C
- Antistatic in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof
- Increased performance
- Suitable for clutches
- Suitable for reserve flexing
- Suitable for highest loads




## Belt structure:



## narrow

Profile	Length range L <sub>d</sub> (mm)
SPB ZAR	1600 - 7500
SPC ZAR	2650 - 12500

## Comparison of products:

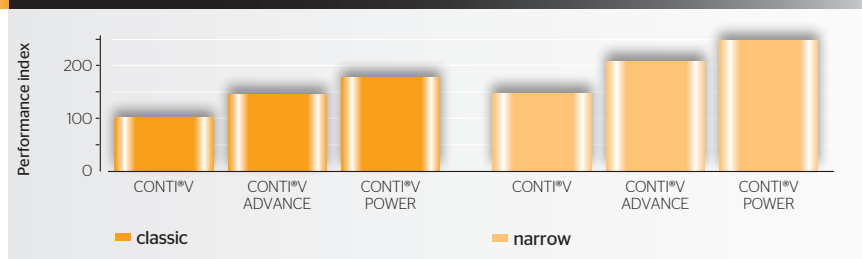

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)