


CONTI[®]V MULTIBELT

Banded V-belts for drives with major load changes

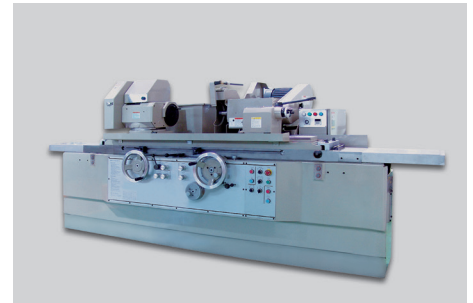

Properties:

- Temperature range from -40 °C to +80 °C
- Enhanced running smoothness
- Antistatic in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

Belt structure:




Profile	Length range L _a (inch) / L _a (mm)
3V (9J)	3V 465 - 3V 1400 / 9J 1181 - 9J 3556
5V (15J)	5V 670 - 5V 3550 / 15J 1702 - 15J 9017
8V (25J)	8V 1000 - 8V 5600 / 25J 2540 - 25J 14224

Profile	Length range L _i (mm) / L _a (mm)
A/HA	1450 - 2240 / 1486 - 2276
B/HB	1106 - 6518 / 1168 - 6580
C/HC	2500 - 12145 / 2575 - 12220

Profile	Length range L _d (mm)
SPZ	1250 - 3000
SPA	1000 - 4000
SPB	1590 - 7500
SPC	2650 - 11200

Comparison of products:

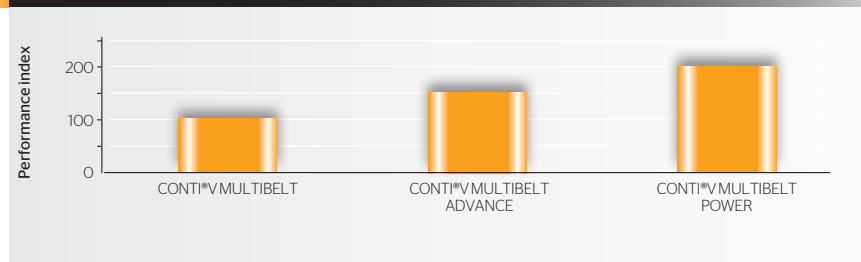

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en