

# CONTI®V FO PIONEER


Transversely stiff raw-edge EPDM heavy-duty V-belts for powerful, sustained power transmission with enhanced running smoothness, according to DIN 7753

## Properties:

- Temperature range from -40 °C to +130 °C, depending on application
- Up to 20% better performance compared with CONTI®V FO ADVANCE
- Very good flexibility thanks to molded teeth
- Matched set L=L series production
- Enhanced running smoothness
- Antistatic in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof




## Belt structure:

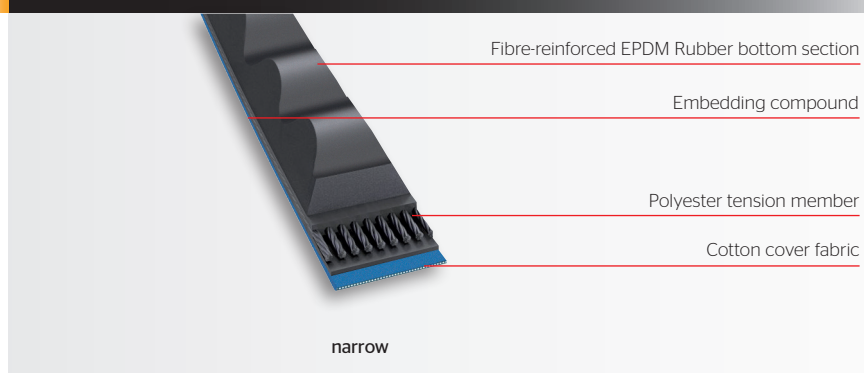

Profile	Length range L <sub>d</sub> (mm)
XPZ / 3VX	512 - 3550
XPA	590 - 4000
XPB / 5VX	1000 - 5000
XPC	1900 - 5000

## Comparison of products:

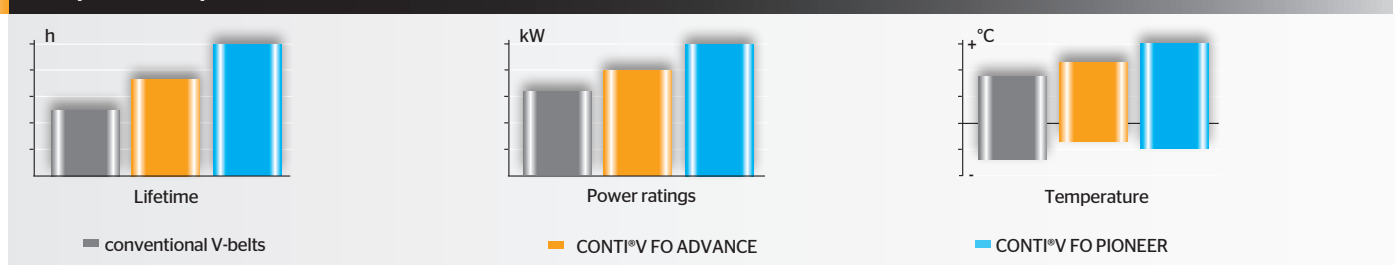

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)

