




CONTI® FUEL GCW 2225

Fuel hose

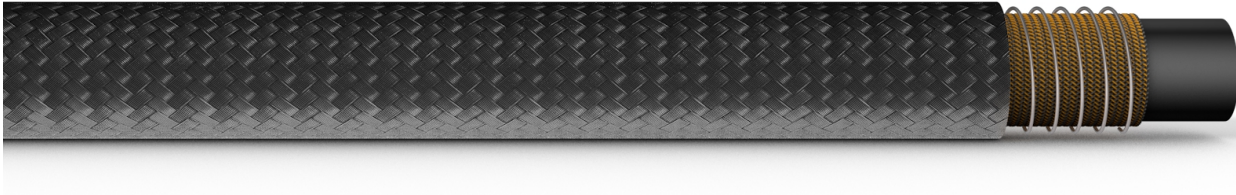

LABEL: Dimension- >NBR/CO/ST< W/J/TC

FLOW MEDIUM

Biodiesel resistant, Diesel fuel

DESCRIPTION

Inner lining: NBR, black

Reinforcements: CO
With integrated steel wire helix

Working pressure up to: 25 bar / 363 psi

Temperature range: from -30 °C / -22 °F up to +70 °C / +158 °F

Further properties: Suitable for biodiesel and methyl ester of rapeseed (RME) upto 70°C
Vacuum stable

TECHNICAL DATA

nominal width zoll/inch	inner-Ø mm	wall thickness mm	outer-Ø mm	working pressure		min. burst pressure		min. bending radius aprx. mm	weight aprx. g/ m
				bar	psi	bar	psi		
5/8	16	4.5	25	15	218	45	653	80	350
1	25	5.25	35.5	15	218	50	725	120	600
1 1/4	32	5.25	42.5	15	218	45	653	170	820
2	50	5.75	61.5	10	145	30	435	320	1200
2 3/8	60	6.25	72.5	8	116	25	363	360	1630

Pressure and vacuum based on room temperature / High pressure and/or temperature lead to reduced component durability / Other dimensions upon request