




# CONTI® FUEL GCW 2226

## Fuel hose

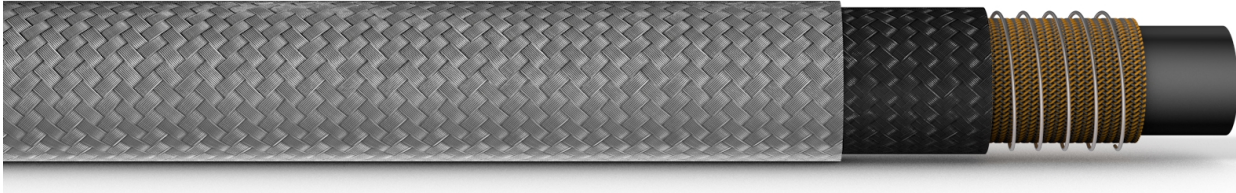

**LABEL:** Dimension- >NBR/CO/ST< W/J/TC

### FLOW MEDIUM

Biodiesel resistant, Diesel fuel

### DESCRIPTION

<b>Inner lining:</b>	NBR, black
<b>Reinforcements:</b>	CO With integrated steel wire helix
<b>Working pressure up to:</b>	55 bar / 798 psi
<b>Temperature range:</b>	from -30 °C / -22 °F up to +70 °C / +158 °F
<b>Further properties:</b>	Hose 22 25 with outside steel braiding with blue colored marking

### TECHNICAL DATA

nominal width Zoll/inch	inner-Ø mm	wall thickness mm	outer-Ø mm	working pressure		min. burst pressure		vacuum		min. bending radius aprx. mm	weight aprx. g/ m
				bar	psi	bar	psi	bar	mmHG		
5/8	16	5	26	45	653	90	1305	-0.7		90	520
7/8	20	5.5	31	38	551	75	1088	-0.65		105	630
1	25	6	37	38	551	75	1088	-0.6		120	730
1 1/4	32	6	44	35	508	70	1015	-0.9		175	990
1 5/8	40	6.5	53	30	435	60	870	-0.8		280	1125
2	50	6.5	63	30	435	60	870	-0.7		335	1400
2 3/8	60	6.75	73.5	25	363	50	725	-0.6		400	1730

Pressure and vacuum based on room temperature / High pressure and/or temperature lead to reduced component durability / Other dimensions upon request