




CONTI® RADIATOR FLEX

For heating and cooling systems

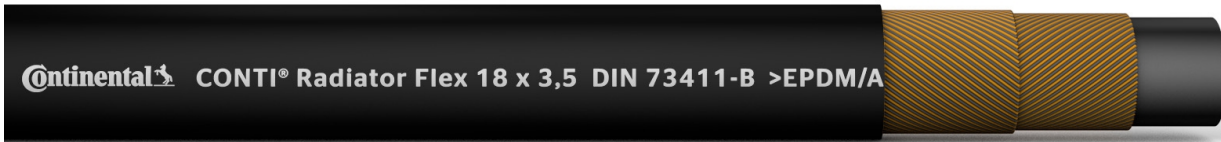

MARKING: Continental CONTI® Radiator Flex 18 x 3,5 DIN73411-B >EPDM/AR/EPDM< Made in Germany

APPLICATIONS

Agriculture, Cooling and heating systems, Cooling systems in combustion engines, Garages, General industry, Machinery and plant engineering, Workshops

FLOW MEDIUM

Antifreeze and corrosion inhibitors, Cooling water, Water

DESCRIPTION

Inner lining: per-EPDM, black, non-porous, smooth
Reinforcements: Aramid
Cover: per-EPDM, black, smooth
Working pressure up to: 3 bar / 44 psi
Temperature range: from -40 °C / -40 °F up to +135 °C / +275 °F

STANDARD / APPROVAL

DIN
73411-B

TECHNICAL DATA

nominal width zoll/inch	inner-Ø mm	wall thickness mm	outer-Ø mm	length m	working pressure		min. burst pressure		min. bending radius aprx. mm	weight aprx. g/ m
					bar	psi	bar	psi		
5/16	8	3.5	15	40	3	44	12	174	70	152
3/8	10	3.5	17	40	3	44	12	174	85	175
1/2	12	3.5	19	40	3	44	12	174	95	201
5/8	16	3.5	23	40	3	44	12	174	115	254
3/4	18	3.5	25	40	3	44	12	174	125	280

Temperature resistance applies only to materials used / All technical data apply at room temperature / Other dimensions upon request